


Rated Current	Rated Voltage	Breaking Capacity
0.5~8A	32V	@32V/AC,DC 1000A
10A	32V	
15A	32V	
20A	32V	
25A	32V	
30A	32V	
35A	32V	
40A	32V	
50A	32V	
60A	32V	
70A	32V	
80A	32V	

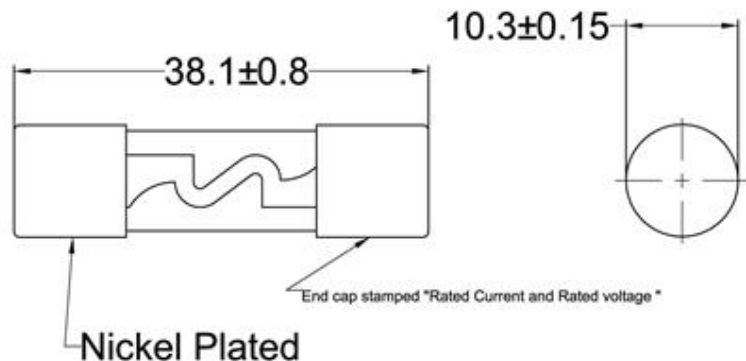

Characteristic specification according to UL 248-1, 14  
**Clear-Time-Current Characteristics**

% of Amp rating	100%	135%	200%
Opening Time	Min.	Max.	Max.
Rated Current			
0.5A-30A	4 h	3600 S	120 S
35A~80A	4 h	3600 S	

- Note: A: 0.5A~10A Temperature rise shall not exceed 75° C  
 B: Interrupting Rating shall be measured at 1000A on 32VDC with a 30 sec voltage hold.  
 C: End Cap shall be withstand an axial pull force of 7N Applied to each cap for 1 minute.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCE		CUSTOMER NO.	DONGGUAN AMPFORT ELECTRONICS CO., LTD.
DECIMALS	ANGULAR	DRAWN BY	TITLE
X ± 0.5	± 2°	CHECKED BY	<b>5AG Miniature Cartridge Fuse</b>
XX ± 0.25		APPROVED BY	PART NO. AGU
DO NOT SCALE DRAWING		DATE 2005.01.15	DRAWING NO. BA01082700
		SCALE	
P/N			
REV	1.2		