



产 品 承 认 书
Product Approval Sheet

客户 (Customer)	
品名 (Product)	拉线特大号防水保险丝盒 Maxi Fuse Holder
系列 (Series)	WXFH-DFS101

料号 (Part No.)	规格描述 (Specification)	备注 (Remark)
WXFH-DFS101	特大号防水插片保险丝盒 Maxi Fuse Holder	

环保符合性说明 (Instructions for RoHS)

本产品符合： RoHS 2.0 HF REACH 其他备注

供应商-安伏特 Supplier-Ampfort		确认合格章 (Confirm qualified Signet)	客 户 (Customer)	零件承认章 (Approval Signet)
制作 Make	黄家芬			
审核 Check	彭义云			
确认 Approval	王忠干			

联络人 Contact

销售 (Sales)	电话 (Telephone)	手机 (Cellphone)	邮箱 (E-mail)

零件承认后敬请回签一份给我司留存至我司，谢谢！

Please return a copy r to us after the product being recognized, thanks!



1. 产品描述 Product Description


WXFH-DFS101 为大型防水插片保险丝座,最大额定电压 86vdc, 额定电流 120A, 广泛应用大型工程车辆电路保护

WXFH-DFS101 is MAX waterproof Fuse holder,Max 120A Voltage 86vdc,which is widely applied in Engineering vehicle circuit protection



2. 尺寸 Shape and Size

单位 Unit: mm

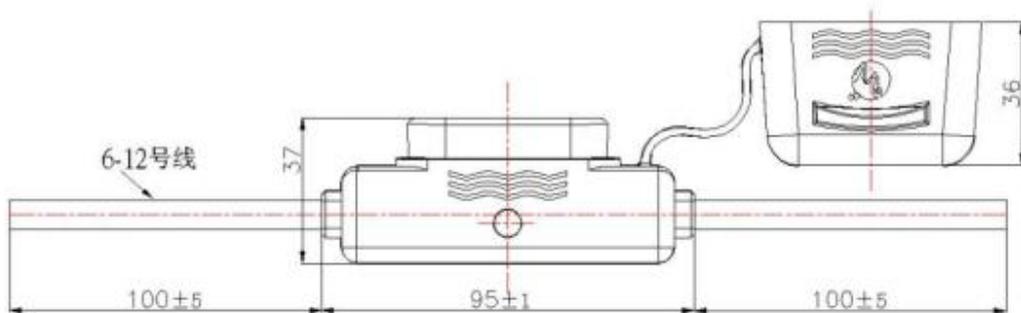

序号 Code	材料 Material	备注 REMARK
1	PVC	UL 94 V0 环保, 改性 PVC 94 V0, environmental protection, heat dissipation
2	H62 黄铜镀镍	H62 brass nickel plating
3	连接线 (Cable)	1015 type 6 -12AWG 600v,红色线, 两端各外露 280mm 长。1015 type 6 -12AWG 600v , The red line is 280mm long with both ends exposed.



3 电气特性(Electrical Characteristic)

保险丝座	额定电流	额定电压	防水等级	绝缘电阻	耐 压
For Fuse	Rated Ampere	Rated Voltage	Watertight	Insulation Resistance	Di-electronic Strength
Max Auto Fuse	120A	86V	IP68	>100M	>1000Vac/60"

4.装配方式(Assembly):

端子接口、焊接(Terminal interface, welding)。